

**BOOSTER SEAT GROUP 2/3**

suitable from 15 to 36 kg



- 1 - This booster seat has been designed to be used with the 3 points safety belt of the rear seat of the car.
- 2 - Place the booster seat on the rear of the car.
- 3 - The lap section of the belt should be routed below the armrests. The diagonal section passes over the child's shoulder, underneath the armrest for Group 2 children (15-25 kg), and above the armrest for Group 3 children (22-36 kg).

Manufactured in France by TEAMTEX - 38230 CHARVIEU

**SAFETY PRECAUTIONS**

**PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. AN INCORRECT INSTALLATION COULD BE DANGEROUS. THIS SEAT MUST NOT BE USED IN THE FRONT SEAT OF THE VEHICLE. It must only be installed in the forward-facing position, using a three-point seat belt approved to R 16 or other equivalent safety standards. Do not use on seats facing sideways or to the rear.**

Rigid elements and plastic parts of the child restraint device must be positioned and installed so that they do not, under normal vehicle usage conditions, become jammed under a moveable seat or in the vehicle door. Keep all straps used to attach the restraint device to the vehicle taut, and adjust

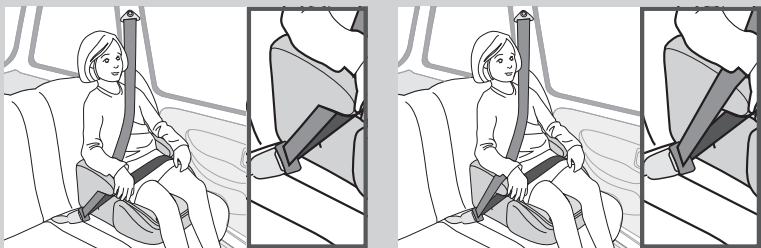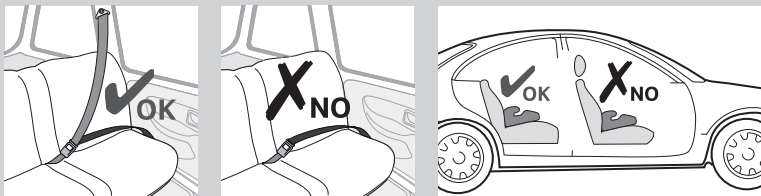

Gr. 2 / 15-25 kg

Gr. 3 / 22-36 kg

the straps used to restrain the child. It is also important that the the straps are not twisted. Make sure the sub-abdominal straps are run as low as possible, to keep the pelvis in good position. Replace the device when it has been subjected to violent stresses in an accident. It is dangerous to modify or add to the device in any way without approval of the competent authority. It is also imperative to follow meticulously the instructions provided by the manufacturer concerning installation of the child restraint device. Keep the seat sheltered from sunlight, so that the child cannot get burned. Do not leave children unsupervised while in a child restraint device. Make sure that luggage and other objects likely to cause injuries to the occupant of the seat if impact occurs are firmly secured. Do not use the child restraint device without the seat cover. Do not replace the seat cover with a cover other than the one recommended by the manufacturer, as it directly influences the behaviour of the restraint device. If you are in any doubt about installation and proper use of your seat, please contact the manufacturer of the child restraint device. Install your child restraint system at the seating positions arranged in the "universal" category in the users' manual, using the primary path of the belt. Do not use load-bearing contact points other than those described in the instructions and marked on the restraint system. Do not place any objects likely to become projectiles in the event of an impact in the beaker holder. Always make sure that the car seatbelt is fastened. Always check that there is no food debris or other such matter in the buckle. In winter take care not to secure the child in with clothes that are too bulky.

**NOTICE**

- 1 - This is a "Universal" Child restraint. It is approved to Regulation N° 44/04. Series of amendments, for general use in vehicles and it will fit most, but not all, car seats.
- 2 - A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for this age group.
- 3 - This child restraint has been classified as "Universal" under more stringent conditions than those which applied to earlier designs which do not carry this notice.
- 4 - Only suitable if the vehicle is fitted with a type approved 3 point static or retractor safety belt in compliance with standard UN/ECE 16 or other equivalent standards.
- 5 - If in doubt, consult either the child restraint manufacturer or the retailer.

