


dream booster

user guide

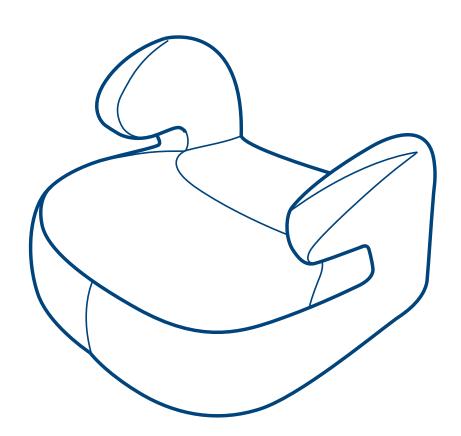

EXTREME HAZARD:

Parents should not under any circumstances use this child restraint on a passenger seat equipped with an airbag.

IMPORTANT! KEEP FOR FUTURE REFERENCE

safety warnings


- PLEASE READ THOROUGHLY BEFORE COMMENCING INSTALLATION AS AN INCOR-RECT INSTALLATION COULD BE DANGEROUS.
- DO NOT USE THIS CHILD SEAT IN PASSENGER SEATS EQUIPPED WITH AIRBAGS.
- This child seat must only be installed in a forward facing position in passenger seats.
 - Do not use on side facing or rear facing seats.
- Never attempt to use this child seat without fastening it into the car as described in these instructions.
- Do not add to or modify the seat in any way.
- It is recommended that this car seat should be changed when it has been subjected to violent stresses in an accident or has become badly worn.
- Do not leave your child unattended in the seat at any time.
- Ensure that no part of the seat is trapped in a door or folding seat. If your car has a folding rear seat, ensure that it is correctly latched in the upright position.
- Car interiors can become very hot when in direct sunlight, it is therefore recommended that the child seat is covered when not in use. This prevents components, particularly those attached to the child seat, becoming hot and burning the child.
- Luggage and other heavy or sharp objects should be secured in the car. Loose objects are liable to cause injury in the event of an accident.
- The safest seating position for a child car seat is on the rear seat of a vehicle.

2 getting to know your child seat

This seat is classified as: **Group 2 and 3** for children weighing from 15kg to 36kg (4 - 12 years approx.) - in a forward facing position.



the type of approved seat belt you must have



Your mothercare child seat can only be installed forward facing using a lap and diagonal seat belt in the front or in the rear passenger seats of the car.

DO NOT INSTALL THIS CHILD SEAT WITH A LAP BELT ONLY.

DO NOT USE THIS CHILD SEAT IN PASSENGER SEATS EQUIPPED WITH AIRBAGS

4 legal requirements

This child seat is approved to ECE R44.04 and is ONLY suitable for use with a 3 point lap and diagonal seat belt, approved to UN/ECE Regulation No.16 or other equivalent safety standards.

front seat

Anyone, especially children, travelling in the front seat of a car must be properly restrained. Children under three years must use a suitable approved restraint designed for their weight.

rear seat

All adults and children must use seat belts or child restraints where they are fitted in the rear of a car and are available for use. If the appropriate restraint is not available, children from 3 years must wear an adult seat belt if available.

5 important notes

- This user guide should be stored under the seat base cover for future reference.
- When the child seat is not in use, it is recommended to keep it on the boot or the "foot well" in the back of the car to avoid being thrown about in the event of an accident.
- If you travel with passengers using both the front and rear seats, the lighter occupants should be in the rear seats and the heavier occupants in the front of the vehicle. When a child is in the front seat, the lighter passenger should be behind the child.
- Do not allow the child seat to come into contact with corrosive substances e.g. battery acid.




fitting your child seat into your car

fig 1



Place the child's car seat on the passenger seat with a 3 point seat belt. Make sure it is facing towards the front of the car.

fig 2




Pull the lap and diagonal sections of the car seat belt across and secure it in the normal way.

For smaller children (15-25 kg), the lap section of the car seat belt should be routed under both of the armrests. The diagonal section of the car seat belt should be routed under the armrest next to the seat belt buckle.

The red belt clip can still be used to position the diagonal belt securely on the child's shoulder. Pass the strap across the child's back, so the clip rests on the child's shoulder, then feed the diagonal belt through the clip. Adjust the strap length so the clip holds the belt securely on the shoulder.

fig 3



For larger children (22-36kg), the lap section of the car seat belt should be routed under both of the armrests. The diagonal section of the car seat belt should be routed over the armrest next to the seat belt buckle.

The red belt clip is not necessary anymore.

7 final checklist

However safe a child seat is, however well built it is, your childs' safety depends on you. Read this final checklist once you have fitted your child seat in your car.

Check you have installed your child seat properly using a 3 point lap and diagonal belt.

Check that both the lap and diagonal sections of the vehicle seat belt are correctly positioned.

Check that your child seat is secure before each journey.

REMEMBER: mis-using your child seat will reduce the protection and safety you offer your child.

IF YOU ARE UNSURE ABOUT THE FIT OF YOUR CHILD SEAT, PLEASE VISIT YOUR LOCAL MOTHERCARE STORE FOR ADVICE.

8

care of your product

removing the fabric cover

■ The fabric cover can be removed from the seat. Please refer to the sewn in label for care instructions.



Slide the seat cover over the armrests of the booster seat.

Simply reverse the above instructions to refit the cover.

cleaning the seat

■ The plastic parts can be sponged with a mild detergent and warm water. Dry thoroughly before use.

9

accessories & replacement parts

Your child seat and its cover have been carefully designed, manufactured and tested to the highest safety standards.

Do not put your child's safety at risk by using without a seat cover. The seat cover should not be replaced with any other than the one recommended by mothercare, because the cover constitutes an integral part of the restraint performance.

The safety of this seat may be compromised by the use of accessories not approved by mothercare. The replacement parts listed below are available for your product. In the event that you require any of these parts, please contact your local mothercare store or contact Customer Care on 08453 30 40 30.



Replacement Parts

- Booster cover
- Diagonal Belt Clip

10

customer care

If you have a problem with this product or require replacement parts, please contact your nearest mothercare store or telephone the mothercare Customer Care Line on 08453 30 40 30.

Alternatively, write to: Customer Care

Mothercare Uk Ltd, Cherry Tree Road Watford, Herts, WD24 6SH

notice

- 1. This is a 'Universal' child restraint. It is approved to Regulation No. 44.04 series of amendments, for general use in vehicles and it will fit most, but not all car seats.
- 2. A correct fit is likely if the vehicle manufacturer has declared that the vehicle is capable of accepting a 'Universal' child restraint for this age group.
- 3. This child restraint has been classified as 'Universal' under more stringent conditions than those which applied to earlier designs which do not carry this notice.
- 4. If in doubt, consult either the child restraint manufacturer or the retailer.
- 5. Only suitable if the approved vehicles are fitted with 3 point static or retractor safety belts approved to UN/ECE Regulation No.16 or other equivalent standards.